

GIS INTEGRATION OF ASTER STEREO IMAGERY FOR THE SUPPORT OF WATERSHED MANAGEMENT

N. CHRYSOULAKIS, M. DIAMANDAKIS, and P. PRASTACOS

Foundation for Research and Technology – Hellas,
Institute of Applied and Computational Mathematics, Regional Analysis Division
P.O. Box 1527, GR-71110, Heraklion, Crete, Greece
E-mail: zedd2@iacm.forth.gr

EXTENDED ABSTRACT

In this study, high spatial resolution stereo imagery from ASTER (Advanced Spaceborne Thermal Emission and Reflection Radiometer), onboard Terra satellite, was analyzed in combination with Global Positioning System (GPS) data and field observations, using GIS techniques to examine the potential of high spatial resolution multi-spectral remote sensing to support watershed management. Terrain elevation data were derived by applying photogrammetric processes to overlapping ASTER stereo pairs for the region of Heraklion, Crete, whereas land cover data were derived by applying supervised classification techniques on ASTER multispectral imagery.

ASTER method gives a strong advantage in terms of radiometric variations versus the multi-date stereo-data acquisition with across-track stereo, which can then compensate for the weaker stereo geometry. Nadir-looking and Backward-looking scenes were used and the output pixel spacing of 15 m was specified. A set of stereo (Ground Control Points) GCP was used for the registration of both scenes. A digital stereo correlation approach and a rigorous parametric model used to calculate parallax differences in ASTER stereo pairs. These GCP were collected with the use of differential ground GPS (Global Positioning System) station of the Regional Analysis Division of FORTH/IACM (Foundation for Research and Technology – Hellas, Institute of Applied and Computational Mathematics). The accuracy for the along-track stereo derived DEM (Digital Elevation Model) from ASTER, was greater than 20 meters (planimetric) and greater than 15 meters (elevation). Supervised classification techniques were applied for land cover production using ASTER multispectral imagery and field observations at predefined application sites. The determination of training areas required in the supervised classification scheme was based on these observations. Finally, GIS methods were applied to estimate watershed characterization parameters for the study area offering the advantages of spatial data handling capabilities and automatic extraction of thematic information. The drainage pattern, which was derived, provided a generally representative depiction of the watershed. The output pixel spacing of 15 m of the produced DEM as well as the high spatial resolution of ASTER imagery found to be quite satisfactory for the watershed characterization of the study area, indicating the high potential of ASTER multispectral imagery to support watershed management. It is therefore expected, the proposed method to provide valuable information to hydrological research and modelling in Greece.

Key words: Stereoscopy, Digital Elevation Model, Global Positioning System, Multispectral Classification, Geographic Information System, Watershed Management.

1. INTRODUCTION

Watershed management addresses the various elements related to reservoir identification given the watershed characteristics in an integrated manner that consider socio-economic issues, as well as, environmental aspects related to flood and drought risks. The watershed is subject to hydrologic processes that are affected by spatial variability of many parameters such as soils, topography, land use and cover, climate and human-induced changes and management. Therefore the integration of spatial data handling capabilities of a Geographic Information System (GIS) with hydrologic or hydraulic models offers the advantage of having information content of the spatially distributed data to analyze the involved process.

Watershed characterization requires at the first step, the construction of a Digital Elevation Model (DEM) to be completed by thematic maps for land use and cover, in addition to other terrain information. DEMs of usable details are still not available for much of the Earth, and when they are available they frequently lack sufficient accuracy. For the production of DEMs from optical satellite data, the respective satellite sensors should have stereo coverage capabilities. To obtain stereoscopy with images from satellite scanners, two solutions are possible [1]: a) the along-track stereoscopy with images from the same orbit using fore and aft images; and b) the across-track stereoscopy from two different orbits. The second solution was the most used since 1980: first, with Landsat from two adjacent orbits, then with SPOT using across-track steering capabilities, and finally with IRS-1C/D. In the last few years, the first solution was used with the JERS-1 OPS, the German Modular Opto-Electronic Multi-Spectral Stereo Scanner (MOMS) and the Advanced Spaceborne Thermal Emission and Reflection Radiometer (ASTER). The viability of stereo correlation for parallax difference/height measurement from digital stereoscopic data has been described and evaluated in previous studies [2], [3], [4]. Al-Rousan and Petrie [5] evaluated commercial software, for the extraction of DEMs using SPOT data. Cheng, et al. [6] generated a DEM from raw IRS-1C LISS stereo-images, over a mountainous area in Arizona. Toutin and Cheng [7] presented results for extraction of DEM from very high spatial resolution IKONOS images, and high spatial resolution ASTER and Landsat ETM+ images.

Recently, at the local level, a number of data sources have been used to derive land cover products, including Landsat TM data for high resolution studies [8]. These studies have been carried out for a number of different applications, including estimation of biomass [8] and vegetation mapping [9]. Vani and Sanjeevi [10] evaluated the potential of ASTER VNIR (Visible and Near Infrared) and SWIR (Short Wave Infrared) sensors for land cover mapping. Information in the VNIR image contributed to the enhancement of vegetation and water classes. Rock and soil units were enhanced due to the contribution by the information in the SWIR images. One of the main problems when generating land cover maps from digital images is the confusion of spectral responses from different features. Sometimes two or more different features with similar spectral behaviour are grouped into the same class, which leads to errors in the final map. The accuracy of the map depends on the spatial and spectral resolution and the seasonal variability in vegetation cover types and soil moisture conditions [11]. Attempts have been made to improve the accuracy of image classification. One approach is the use of multi-temporal imagery to distinguish classes [12], [13]. Another is the piecewise linear classifier with simple post-processing [14]. The integration of GIS with ancillary information has also been tested, to improve image classification. Gastellu-Etchegorry et al. [15] and Ortiz et al. [16] integrated GIS with information about soils, topography and bioclimate. Similarly, Palacio-Prieto and Luna-González [17] employed GIS rules with ancillary data on terrain mapping units and elevation data.

DEM and land cover products are primary inputs for hydrologic models for surface runoff that affects infiltration, erosion, and evapotranspiration, playing important role in determining the runoff characteristics of a specific catchment area. A hydrologic land cover classification must incorporate the ability to display information not only about vegetative species, but also about the land surface and what classes are important hydrologically. To be useful this classification must incorporate elevation, slope, aspect, surface roughness, and vegetation species derived from satellite imagery and classification of that imagery. Satellite remote sensing and GIS have been found useful tools in identification and categorisation of watersheds on the basis of natural resources and their limitations. Drainage basins, catchments and sub-catchments are the fundamental units for the management of land and water resources. Catchments and watersheds have been identified as planning units for administrative purpose to conserve these precious resources [18]. The concept of watershed management recognises the inter-relationships between land cover/use, soil and water and the linkage between uplands and downstream areas.

In this study, high spatial resolution satellite imagery was analyzed in combination with Global Positioning System (GPS) data and field observations, using GIS techniques, to provide DEM, land cover thematic maps and watershed characterization products, capable of supporting watershed management.

2. DATA AND METHODOLOGY

The data used in this study were a Terra/ASTER image of August 10, 2000 at 09.25 LST, over the region of Heraklion, Crete, Greece and GCPs (Ground Control Points) derived from GPS measurements from the differential GPS ground station of the Regional Analysis Division of FORTH/IACM (Foundation for Research and Technology – Hellas, Institute of Applied and Computational Mathematics). The ASTER method is used because it gives a strong advantage in terms of radiometric variations versus the multi-date stereo-data acquisition with across-track stereo, which can then compensate for the weaker stereo geometry. Field observations have been also used for training site selection for the supervised classification of ASTER multipsectral imagery. A Transverse Mercator projection was applied (Projection System: Hellenic Geodetic Reference System 87 - HGRS87) in order to have all data in the same cartographic projection system.

ASTER is an advanced multispectral imager that was launched on board NASA's Terra spacecraft in December, 1999. ASTER covers a wide spectral region with 14 bands from the visible to the thermal infrared with high spatial, spectral and radiometric resolution. ASTER consists of three separate instruments subsystems, each operating in a different spectral region, using separate optical system. These subsystems are the VNIR, the SWIR and the thermal infrared (TIR). The spatial resolution varies with wavelength: 15 m in the VNIR, 30 m in the SWIR and 90 m in the TIR. The VNIR subsystem consists of two telescopes – one nadir looking with a three band detector (Channels 1, 2 and 3N) and the other backward looking (27.7° off-nadir) with a single band detector (Channel 3B). The SWIR subsystem consists of one telescope with a six band detector (Channels 4, 5, 6, 7, 8 and 9). The TIR subsystem consists of one telescope with a five band detector (Channels 10, 11, 12, 13, and 14). The most important specifications of the ASTER stereo subsystem that govern the DEM generation capabilities, include: stereo geometry; platform altitude of 705 km and ground speed of 6.7 km/sec; B/H of 0.6; IFOV of 15 m; bandpass of 0.76-0.86 micrometers in channel 3N and 3B, both with an MTF of 0.24; 9 seconds required to acquire a 60 x 60 km scene; 64 seconds required to acquire a stereo pair [2].

ASTER 3N and 3B images were used for DEM production, whereas VNIR and SWIR imagery were used for land cover classification and mapping. Field measurements with the use of differential GPS were also performed to provide GCPs for DEM correction and geo-location, as well as to support field observations and training site selection for the necessary for land cover mapping supervised classification. Finally, GIS tools were used for the watershed characterization. The overall methodology is shown in Figure 1.

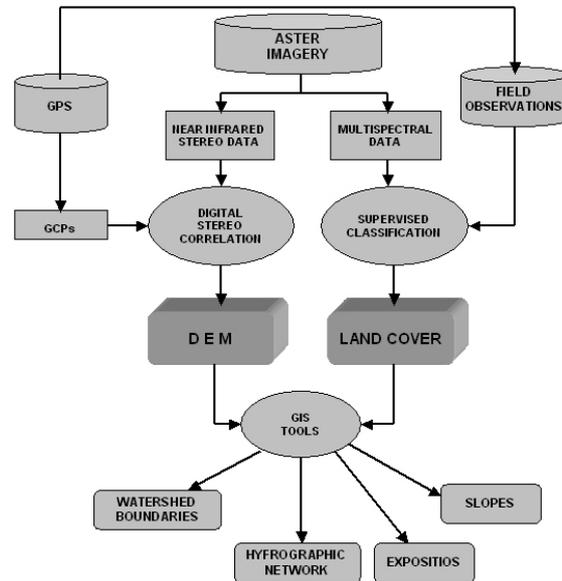


Figure 1: The methodology steps.

A digital stereo correlation approach used to calculate parallax differences from ASTER stereo pair. The mathematical concept of one approach to stereo correlation is given by Lang and Welch [2]. Relative ground elevations were determined by measuring the parallax differences in the registered images. The parallax differences were converted to absolute elevations with the use of GCPs. The image coordinates of the GCPs in conjunction with their HGRS87 map coordinates allowed the development of transformation equations needed to register the stereo images and eventually geodetically rectify them to the Earth's surface. The used geometric model was a rigorous parametric model developed at the Canada Centre for Remote Sensing [19]. Assuming parallax difference correlation errors in the range of 0.5 to 1.0 pixels (7-15 m), elevation errors (RMSE_z) would be in the ±12 m to ±26 m range. The Root Mean Square Error (RMSE) in XY (planimetry) and Z (elevation) were used for the DEM accuracy assessment.

Following, the land cover classification scheme was established for ASTER VNIR and SWIR imagery. The differential GPS used for the positioning of training areas and for the collection of ground truth data during the field observations. A supervised classification technique was performed employing the Bayesian Maximum Likelihood Classifier. The maximum likelihood method was adopted using the training samples obtained from the ground truth. Assessing the hydrologic response of the watershed using spatially distributed characteristics could provide a valuable tool for hydrologic research and watershed management. In this study, the DEM and land cover products were used for a GIS-based watershed characterization in the NW Heraklion prefecture area to determine: a) the hydrographic network; b) the maps of slopes, expositions, direction of flow and ponds and c) the limits and boundaries of the watershed and sub-watersheds.

Essentially four steps were carried out to delineate the drainage network: removing sinks in the DEM, assigning flow direction per cell, assigning flow accumulation values per cell,

and determining the threshold flow accumulation value that best represented the drainage pattern. Additional analysis steps were carried out to derive physical characteristics of the watershed from the elevation data. Elevation and flow direction were the essential data from which all of the other drainage computations were made. The slope was determined from the change in elevation divided by the distance between cells, determined between the centers of the cells in question. The ESRI ArcView flow accumulation function was used to query the flow direction grid to identify those cells deemed to be upslope of the cell in question and create a grid of accumulated flow to each cell by summing the weight for all cells that flow into each downslope cell. Once the flow direction and flow accumulation were determined, stream networks were identified by setting a threshold for the flow accumulation to define the beginning of a stream. Watersheds for any point were determined by identifying all cells that flow into a particular cell of interest. With the aid of the flow accumulation, the location of the watershed outlet was determined and an outlet feature point was created. A minimum threshold was defined and all of the DEM points upstream from the defined outlet were connected together to form a stream network of feature lines. Using the outlets on the stream network and the flow directions, the contributing DEM points for each outlet were assigned the proper basin id. The boundaries between DEM points with different basin ids were converted to feature polygons. Once the boundaries of the sub-basins were determined, geometric properties important for hydrologic modelling (area, slopes, runoff distances, etc.) were computed from the DEM data.

3. RESULTS

ASTER NIR stereo imagery was used for DEM production. Stereo GCPs were available within ± 2 m accuracy. PCI photogrammetric software (Orthoengine) was employed for DEM production. Figure 2 shows the produced DEM for the NW Heraklion area. Catchments and mountainous areas are clearly depicted. DEM planimetric accuracy was estimated at ± 15 m (1 ASTER pixel), whereas its vertical accuracy was estimated using 200 trigonometric points, available from 1:5000 topographic maps for the prefecture of Heraklion. The elevation of each trigonometric point was compared with the elevation of the respective DEM pixel and it was founded that (with 95 % confidence) the RMSE was ± 11 m. GIS techniques were used for slope extraction from the produced DEM.

Following, the developed land cover classification scheme was applied in ASTER VNIR and SWIR imagery. Eight classes were defined: a) water, b) urban areas, c) bare soil, d) sclerophyllous vegetation, e) natural grasslands, f) olive trees, g) vineyards and h) complex cultivated patterns. Several training areas for each class were defined and located using the DGPS system and evaluated to make sure there was suitable discrimination of individual classes. Then a supervised classification was performed using the training samples obtained from the ground truth. Because an hydrologic land cover classification must incorporate the ability to display information about what classes are important hydrologically, an additional classification step was adopted. The aforementioned five vegetation classes provided by the supervised classification process, as well as the elevation and the slope for each pixel provided by the DEM were used in this step. Furthermore, using the criterion of steep and gentle slopes for the vegetative areas, 13 classes were finally produced. The final classification product is presented in Figure 3. This land cover product can be used as a GIS coverage providing land cover classes that are hydrologic in nature, and which are conducive to hydrologic modeling.

DEM and land cover products were used as input in GIS tools for the watershed characterization process as shown in Figure 1. Elevation and flow direction were the essential data from which all of the other drainage computations were made. Using the

flow accumulation function, the location of the watershed outlet was determined and an outlet feature point was created. The watershed was subdivided into sub-basins by converting the nodes along the stream feature arcs to outlet nodes. Figures 4 and 5 show the hydrographic network and the watershed boundaries, respectively, two of the final watershed characterization products derived from GIS analysis.

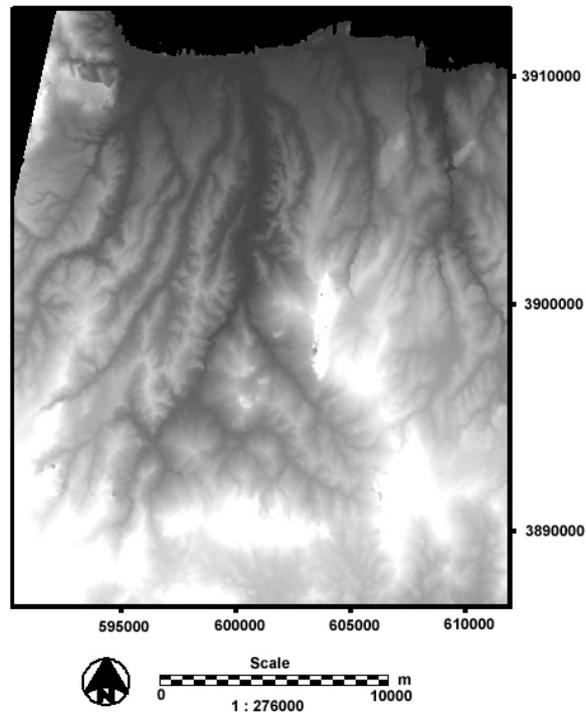


Figure 2: DEM for the NW Heraklion area as derived from ASTER stereo imagery.

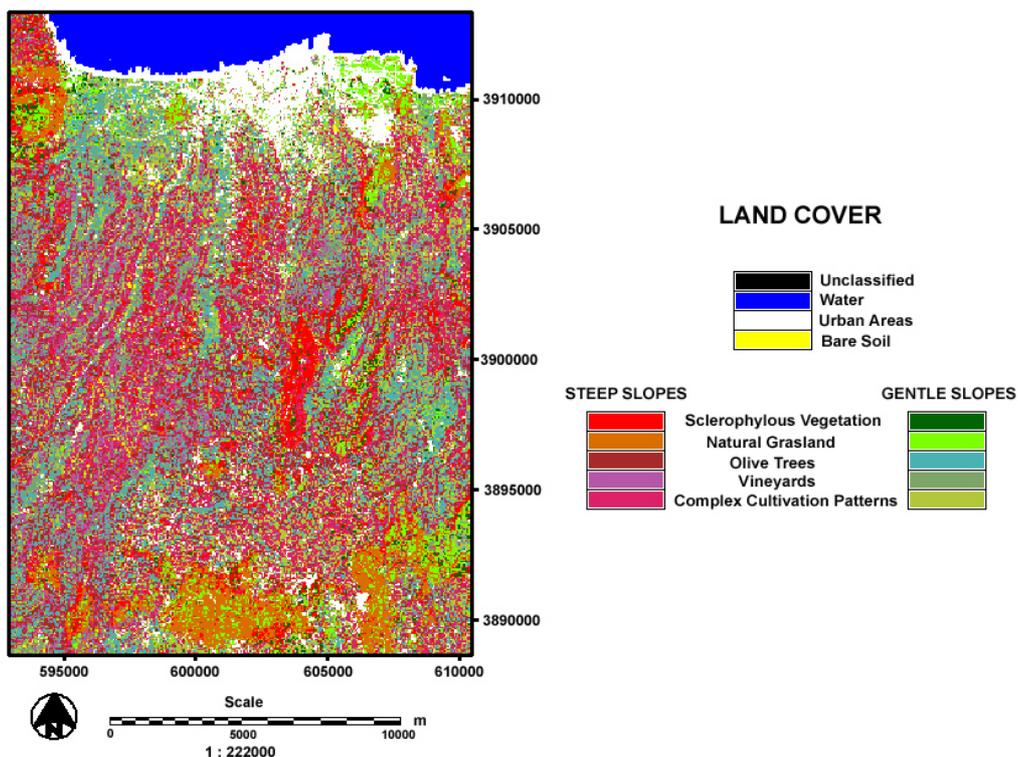


Figure 3: The final land cover product for the NW Heraklion area. ASTER multispectral imagery, as well as elevation and slopes derived from ASTER DEM have been used.

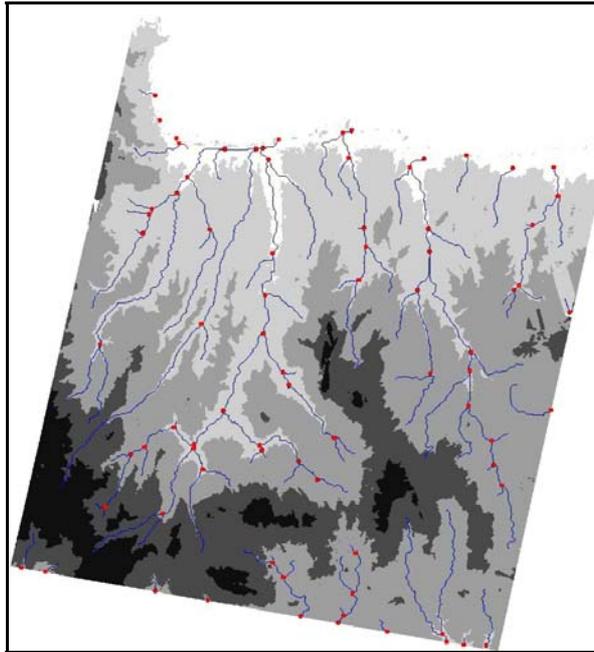


Figure 4: Watershed outlets and hydrographic network.

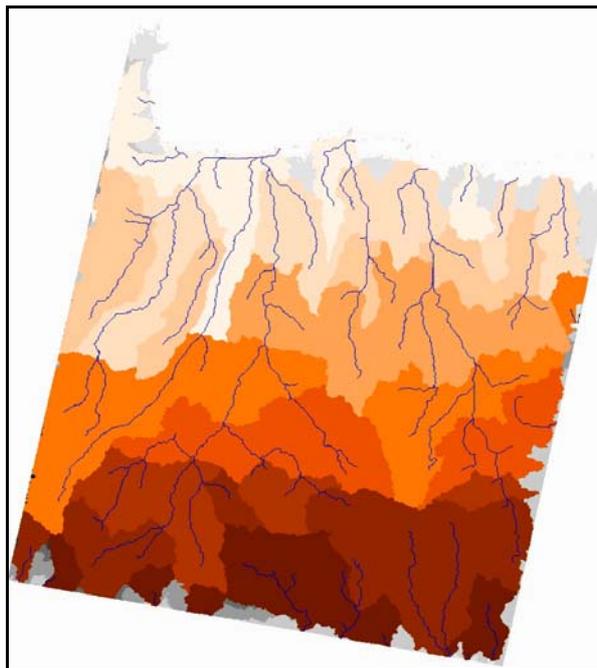


Figure 5: Sub-basins definition and watershed boundaries.

4. CONCLUSIONS

In this study, high spatial resolution ASTER imagery was analyzed in combination with GPS data and field observations to provide DEM, land cover thematic maps and watershed characterization products, capable of supporting watershed management. The ASTER method was used because it gives a strong advantage in terms of radiometric variations versus the multi-date stereo-data acquisition with across-track stereo, which can then compensate for the weaker stereo geometry. Near infrared stereo imagery was used for DEM production, whereas VNIR and SWIR imagery were used for land cover classification and mapping. Field measurements performed to provide GCPs for DEM

correction and geo-location, as well as to support field observations and training site selection for the necessary for land cover mapping supervised classification. Likewise, a hydrologic land cover classification scheme was applied by combining the vegetation classes provided by the supervised classification process with the slope for each pixel provided by the DEM. Finally, GIS tools were used for the watershed characterization. GIS methods were applied to estimate watershed characterization parameters offering the advantages of spatial data handling capabilities and automatic extraction of thematic information. The sinks in the DEM were removed, the flow direction and the flow accumulation values per cell was assigned and drainage pattern was extracted providing a generally representative depiction of the watershed. The planimetric and elevation accuracy of the produced DEM (± 15 and ± 11 m, respectively) are considered quite satisfactory for large catchment hydrological parameterization, indicating the high potential of ASTER multispectral imagery to support watershed management.

REFERENCES

1. Toutin Th. (2001) 'Elevation Modelling from Satellite VIR Data: A Review', *Int J Remote Sens*, **22**, 1097-1125.
2. Lang, H., and Welch, R. (1999) 'ATBD-AST-08 Algorithm Theoretical Basis Document for ASTER Digital Elevation Models', Standard Product AST14 Report, *The Jet Propulsion Laboratory, California Institute of Technology, Los Angeles, USA*.
3. Ackermann, F. (1994) 'Digital elevation models —techniques and application, quality standards, development', *Int Arch Photogrammetry Remote Sens*, **30**, 4, 421-432.
4. Bolstad, P.V., and Stowe, T. (1994) 'An evaluation of DEM accuracy: Elevation, slope, and aspect' *Photogramm Eng Remote Sen*, **60**, 1327-1332.
5. Al-Rousan, N., and Petrie, G. (1998) 'System calibration, geometric accuracy testing and validation of DEM and orthoimage data extracted from SPOT stereopairs using commercially available image processing systems', *Int Arch Photogrammetry Remote Sens*, **32**, 4, 8-15.
6. Cheng Ph., Toutin Th., and Stohr C. (1999) 'Automated DEM Extraction from Aerial Photos or Optical Satellite Images', *Proceedings of the 13th International Conference on Applied Geologic Remote Sensing, March 1-3, 1999, Vancouver, Vol. 1, pp. 56-63*.
7. Toutin, Th. and Cheng, Ph., (2000) URL: <http://www.eomonline.com/Common/Archives/July00/toutin.htm>
8. Steininger, M. K. (2000) 'Satellite estimation of tropical secondary forest above-ground biomass: data from Brazil and Bolivia', *Int J Remote Sens*, **21**, 1139 – 1175.
9. Muchoney, D., Borak, J., Chi, H., Friedl, M., Gopal, S., Hodges, J., Morrow, N. and Strahler, A. (2000) 'Application of the MODIS global supervised classification model for vegetation and land cover mapping of Central America', *Int J Remote Sens*, **21**, 1115 – 1138.
10. Vani, K. and Sanjeevi, S. (2002) URL: <http://www.gisdevelopment.net/application/environment/pp/envp0005.htm>.
11. Congalton, R.G. (1988) 'Using spatial autocorrelation analysis to explore the errors in maps generated from remotely sensed data', *Photogramm Eng Remote Sen*, **54**, 587-592.
12. Conese, C. and Maselli, F. (1991), 'Use of multi-temporal information to improve classification performance of TM scenes in complex terrain', *ISPRS J Photogramm Remote Sen*, **46**, 187-197.
13. Barbosa, P.M., Casterad, M.A. and Herrero, J. (1996) 'Performance of several Landsat 5 Thematic Mapper (TM) image classification methods for crop extent estimates in an irrigation district', *Int J Remote Sens*, **17**, 3665-3674.
14. Kai-Yi Huang and Mausel, P. (1993) 'Spatial post-processing of spectrally classified video images by a piece wise liner classifier', *Int J Remote Sens*, **14**, 2563-2573.
15. Gastellu-Etchegorry, J.P., C. Estreguil, and Mougín, E. (1993) 'A GIS based methodology for small-scale monitoring of tropical forests - A case study in Sumatra', *Int J Remote Sens*, **14**, 2349-2368.
16. Ortiz, M.J., R. Formaggio, and J. C.N. Epiphanyo, J. C.N. (1997) 'Classification of croplands through integration of remote sensing, GIS and historical database', *Int J Remote Sens*, **18**, 95-105.
17. Palacio-Prieto, J.L. and Luna-González, L. (1996) 'Improving spectral results in a GIS context', *Int J Remote Sens*, **17**, 2201-2209.
18. Khan, M. A. (1999), 'Water balance and hydrochemistry of precipitation components in forested ecosystem in the arid zone of Rajasthan, India', *Hydrological Science Journal*, **44**, 149 - 161.
19. Toutin Th. (1995) 'Multi-source Data Fusion with an integrated and Unified Geometric Modelling', *Advances in Remote Sensing EARSel Journal*, **4**, 118 – 129.